


218.00 EUR  
incl. 19% VAT, plus [shipping](#)

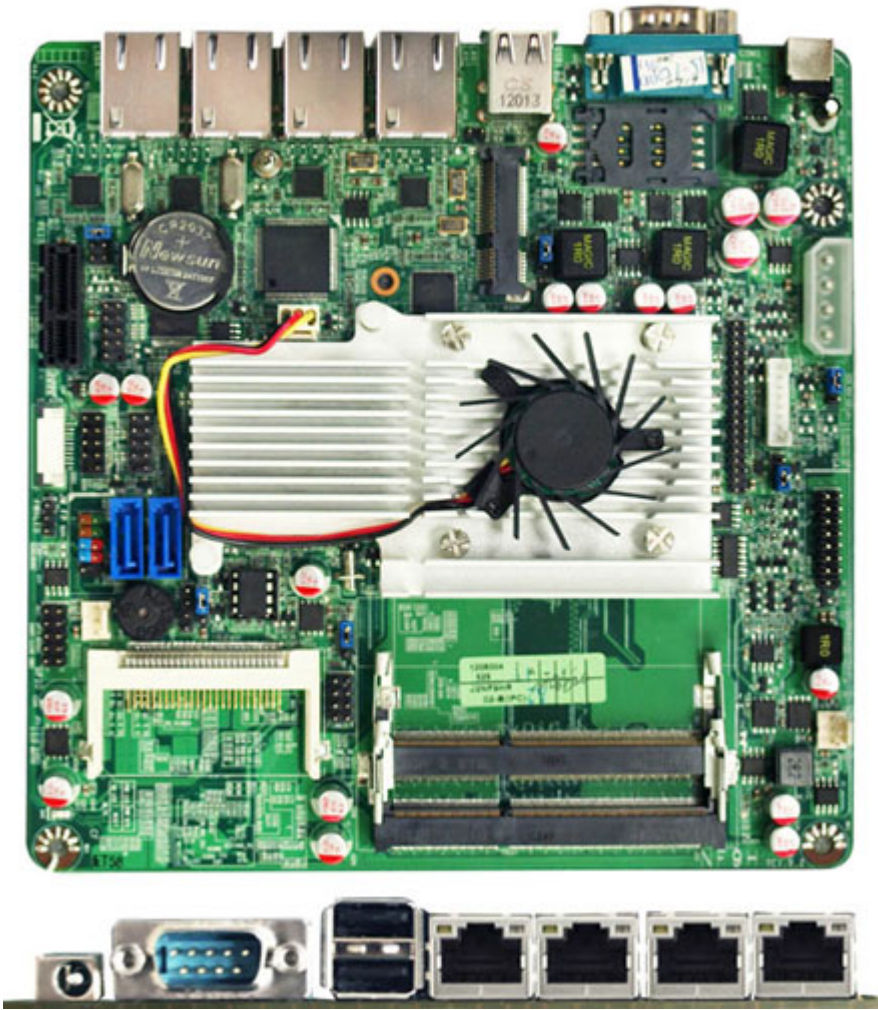

- INTEL® Atom Processor D525 + ICH8M Chipset
- Support INTEL® Atom D525 (Dual Core) CPU
- Support 2 \* DDR3 800MHz Single CH SO-DIMM up to 4GB
- Support CPU Smart FAN
- Integrated 18-bit Single Channel LVDS
- 4 \* Realtek RTL8111EVL Gigabit LAN
- Support CF card
- Support SIM card (optional)
- Supports ACPI S3 Function
- Support Watch dog Technology
- Support +12V Power onboard

|                          |  |
|--------------------------|--|
| • <b>CPU</b>             | • INTEL® Atom D525 (Dual Core) CPU   |
| • <b>Chipset</b>         | • INTEL® Atom Processor D525 + ICH8M Chipset   |
| • <b>Memory</b>          | • 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB  |
| • <b>Expansion Slots</b> | • 1 * PCI-E x 1 slot<br>• 1 * MINI PCI-E   |
| • <b>Storage</b>         | • 2 * Serial ATA2 3Gb/s connectors<br>• 1 * CF card socket<br>• 1 * mSATA (Selectable with Mini PCI-E) |
| • <b>Ethernet LAN</b>    | • 4 * Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN  |
| • <b>LVDS</b>            | • Onboard 18-bits single channel LVDS connector  |
| • <b>USB</b>             | • Embedded 6 * USB 2.0/1.1   |

|                           |   |
|---------------------------|---|
| • <b>Special Features</b> | <ul style="list-style-type: none"> <li>• Support ACPI S3</li> <li>• Support CPU Smart FAN</li> <li>• Support Watch Dog</li> </ul>   |
| • <b>Rear Panel I / O</b> | <ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 ports</li> <li>• 4 * RJ-45 ports</li> <li>• 1 * COM port</li> <li>• 1 * 12V DC in</li> </ul>   |
| • <b>Internal I / O</b>   | <ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports</li> <li>• CPU /NB / Chassis Fan connectors;</li> <li>• 1 * 32-pin LVDS headers &amp; 1 * GPIO header</li> <li>• 1 * COM header (support RS232/422/485)</li> <li>• 1 * SIM card socket (optional)</li> </ul> |
| • <b>BIOS</b>             | • AMI 16MB UEFI DIP Flash ROM   |
| • <b>Form Factor</b>      | • Mini ITX Form Factor(170mm x 170mm)   |
| • <b>Functional</b>       | • Networking Appliance  |
| • <b>Certificate</b>      | • CE, FCC, RoHS   |
| • <b>Temperature</b>      | <ul style="list-style-type: none"> <li>• Operating within 0~60 centigrade</li> <li>• Storage within -20-85 centigrade</li> </ul>  |

**Product Accessories**

- Manual
- CD
- 1x SATA cable
- I/O shield
- 1x SATA power cable